

HWTS1 DUAL SPECS SHEET



The **HWTS1 DUAL** Thermostat enables you to control your heated towel rail and your underfloor heating. It boasts a full touchscreen operation.

It offers both 7-day programming (the thermostat will do the same thing every day) and 5+2 day programming (the thermostat can have different programming on the weekends).

Alternatively, you can program each day differently. The HWTS1 offers both Floor Sensing and Air Sensing functionality. It can also be set to be horizontal or vertical through the menu.

A WiFi Compatible version is also available.



It is available in **Black, White and Silver**.

HWTS1 TECHNICAL DATA

Voltage: 110/230V~50/60Hz

Relay: Max.16A (Resistive load) Floor Heating, 10A Heated Towel Rail

Floor Sensor Type: 3K 5K 6.8K 10K (default) 12K 15K 20K 22K 33K 47K 50K 100K

Temperature range:

Room Temperature: 5-60°C

Floor Temperature Limit: 5-60°C

On/Off Differential: ±0.5, 1, 2, 3°C


Storage temperature: -10-50°C

IP Class: IP21




Specs are a guideline. We are confident in the manufacturing of our product meeting our specs, However we recommend waiting for the rail before drilling holes in case of 1 or 2 mm differences. Specs can be used for rough in and timber supports without issue.


FRONT

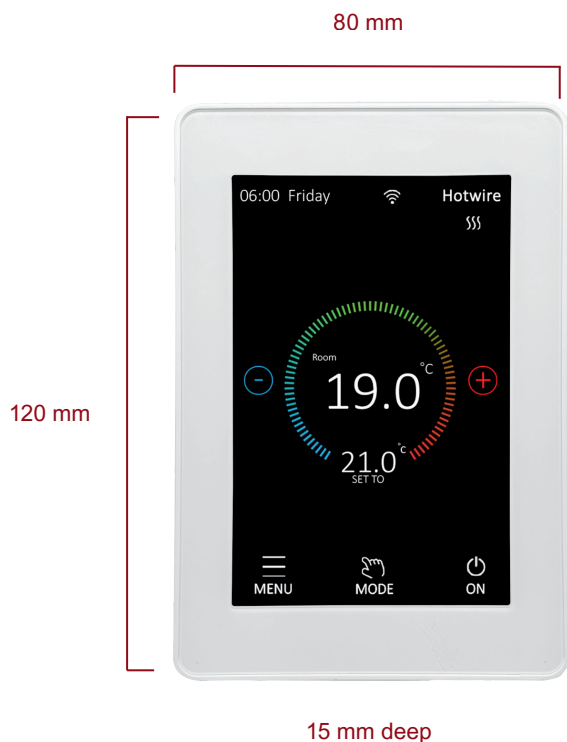

BACK

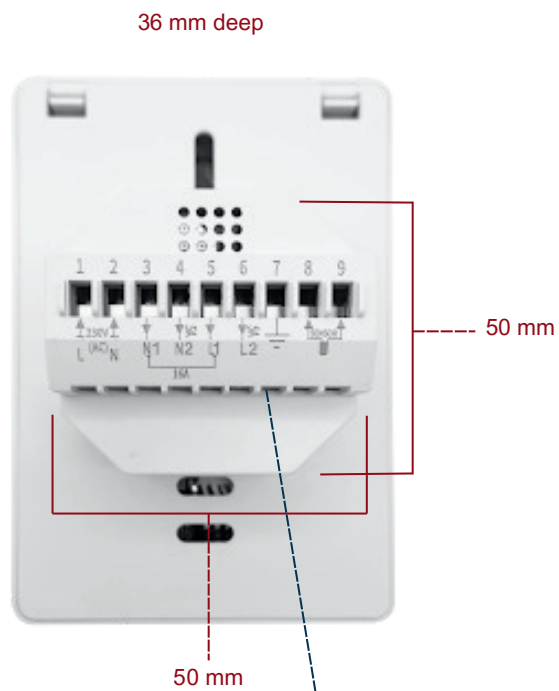

36 mm deep

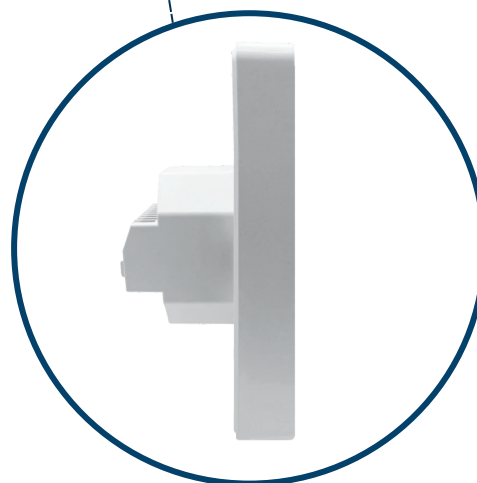

Specs are a guideline. We are confident in the manufacturing of our product meeting our specs, However we recommend waiting for the rail before drilling holes in case of 1 or 2 mm differences. Specs can be used for rough in and timber supports without issue.